



Ferguson Ariva 153 Combo is a versatile receiver that offers access to satellite TV in DVB-S/S2 standards, cable TV in DVB-C standard and also terrestrial TV in DVB-T standard. The decoder is also compatible with the DVB-T2 standard, which offers better quality and range of programs. The device, which is equipped with two heads, allows for simultaneous viewing and recording two different channels. With USB port, you can play from and record to an external disk your favorite programs, music, videos and photos. Practical **multiroom** feature allows you to simultaneously watch different channels in two rooms. Ariva 153 Combo also offers access to popular web services such as YouTube, YouPorn (adult channels can of course be protected from unauthorized playback), DailyMotion, RSS, Weather, Google Maps and many others. 153 Combo is also very energy-efficient - power consumption in standby mode does not exceed 0.5W.



Ferguson Ariva 153 Combo is a true multimedia center for your home. Wide range of supported containers and codecs will ensure trouble-free access to most multimedia files. Formats supported by the media player:

- video: AVI, MKV, MPEG, MPG, M2TS, VOB, TS, TRP, MP4, DVR (default record format)
- video codecs: MPEG2, XVID, H.264 (up to 8 RF)
- subtitles: TXT, SRT, SUB, SSA, SMI
- audio: MP3, FLAC or OGG
- picture: JPG, JPE, JPEG, BMP, PNG




## Specification:

- Reception of high definition channels (High Definition)
- PAL upscaling to 720p or 1080p
- Full audio support for E-AC3 (Dolby Digital Plus)
- Supports 32 programmable timers
- Separate lists of favorite TV and Radio
- Quick search function channels (QuickFind)
- Teletext and subtitles
- Supports DiSEqC 1.0, 1.1, Unicable and DiSEqC 1.2, USALS
- Support for MPEG-2, MPEG-4, MPEG-4 AVC/H.264
- Compatible with DVB-S, DVB-S2, DVB-C, DVB-T and DVB-T2 standards
- Card reader for pay TV

## Wi-Fi

The receiver supports 802.11b/g/n WiFi USB adapters based on the Ralink chip Rt5370, offered as a separate accessory.

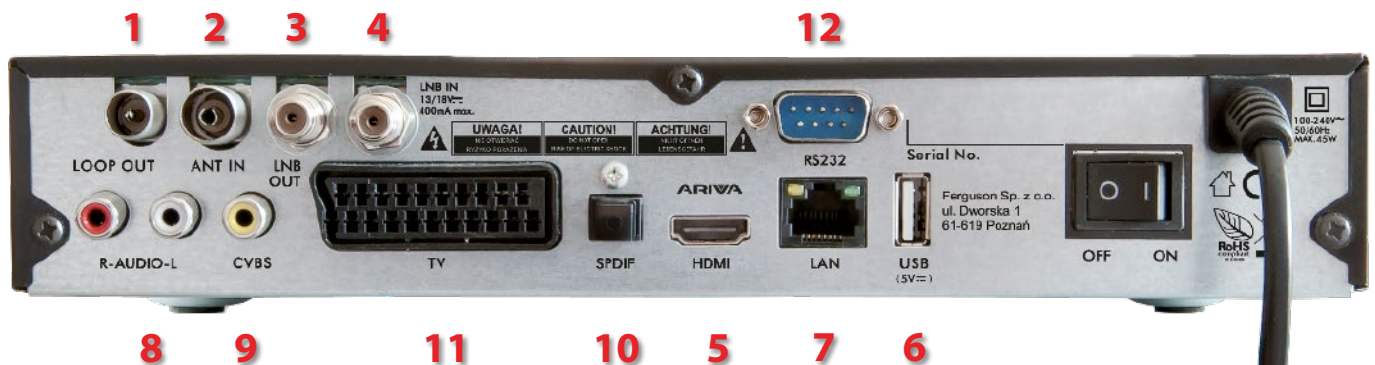

## Inputs/Outputs:

1. **LOOP OUT:** Output of digital terrestrial TV signal to another receiver.
2. **ANT IN:** Input antenna cable.
3. **LNB OUT:** Output from the converter to the other receiver.
4. **LNB IN:** Input coaxial cable from the converter.
5. **HDMI:** Digital video and digital sound output.
6. **USB:** Port for connecting an external USB storage device.
7. **LAN:** Ethernet port used for communication over LAN / Internet.
8. **AUDIO (L/R):** Analog stereo audio output 2xRCA.
9. **CVBS:** Analog video output 1xRCA.
10. **SPDIF:** Digital optical audio output.
11. **TV:** SCART output to connect the TV.
12. **RS232:** RS232 port for communication with a PC.

## Remote

Ariva 153 Combo comes with an extremely convenient and intuitive remote control with the symbol RCU540. The pilot sits perfectly in the hand and allows you to conveniently operate all the functions of the receiver.

**Note:** it is possible to operate the receiver using any device based on Android or iOS via free **Ariva STBRemote** app.



## Package



Dimensions: Width: 272 mm, Height: 236 mm, Depth: 60 mm.

Packaging: 20 pcs.

## EAN Code

Code: 5907115002286



**SMALL2BIG**

**Small2Big** is a unique functionality of the satellite receiver that allows you to display multimedia content (videos, photos) with your phone or tablet on your TV. The function is dedicated for use by the Android system. This function works within your local area network (LAN).



**BIG2SMALL**

**Big2Small** is another unique feature that allows you to view TV programs from the receiver directly on the screen of your phone or tablet. The function is dedicated for use by the Android system. This function works within your local area network (LAN).