

User manual



# ARIVA T60



*English*



---

# WARNING !!!



Ferguson satellite receivers support recording on external hard disk drives (HDDs) and flash memories (pendrives). In all instances, the correct operation of the recording function depends on the type of connected memory! You must read the following limitations.

## REMEMBER:

1. In order to use an external USB memory, the memory must support the USB 2.0 standard. To ensure stable recording and playback, **you must use a memory with a recording speed of 9.0 MB/s or greater**. Slower hard disk drives and flash memories may not function properly, have problems with recording (image jitter), or not function at all!!!
2. Only disks with one basic NTFS or FAT32 partition (we recommend using the NTFS format) will function properly. If you do not have such a format, prepare the disk on your computer before connecting it to the receiver.
3. Highly fragmented or used memories may also not operate smoothly or correctly.
4. External hard disk drives should be autonomously powered, since the built-in USB port is unable to provide sufficient power.

## CAUTION

1. Under no circumstances should you disconnect the USB device from the receiver during recording or playback. Disconnecting during operation may cause damage to the receiver and/or flash memory, and to the recorded data.
2. Do not touch the working device (and in particular the USB connector) with wet hands. Risk of electric shock and permanent damage to the receiver!

---

## Table of contents

SAFETY MEASURES.....	5
DOWNLOADABLE SOFTWARE.....	5
ABOUT THE INSTRUCTION MANUAL.....	6
MARKINGS AND SIGNS APPLIED TO THE RECEIVER.....	6
BASIC INFORMATION ABOUT THE RECEIVER.....	7
1. Main features.....	7
2. Contents of box.....	7
3. Important instructions concerning handling of the receiver.....	7
4. Remote control.....	8
4.1 Installation of batteries.....	9
5. Front panel.....	9
6. Rear panel.....	10
7. Connecting an aerial.....	10
8. Connecting the satellite receiver.....	11
8.1 Connection by means of an HDMI cable (recommended).....	11
8.2 Connection by means of SCART cables.....	12
8.3 Connection of an audio system.....	12
8.4 Connection of an external memory.....	13
8.5 Connection of another receiver.....	13
FIRST STEPS.....	14
INFORMATION ABOUT THE USER MENU.....	14
10. Main menu.....	15
11. Installation.....	15
11.1 Auto search.....	15
11.2 Manual Search .....	16
11.3 Language.....	16
11.4 Local time settings.....	17
Menu- Installation- Time Zone.....	17
12. TV System.....	18
12.1 Parental lock.....	19
12.2 OSD settings.....	19
13. Tools.....	20
13.1 Calendar.....	20
13.2 Schedule.....	20
13.3 Games.....	20
13.4 Information.....	20
13.5 Factory settings.....	20
13.6 Upgrade by USB.....	21
13.7 Upgrade by OTA.....	21
15. PVR – recording configuration.....	22
15.1 Recordings.....	22
15.2 Storage info.....	22
15.3 TimeShift.....	23
15.4 Timer settings.....	23
15.5 Media Player.....	24
16. Edit channels.....	25
16.1 TV channels list.....	25
How do I move a channel?.....	25
How do I delete a channel?.....	26
How do I add to the group of favourites?.....	26
How do I change a channel name?.....	27
16.2 Radio channel list.....	27
16.3 Favorite.....	28
17. Basic functions supported by the remote control.....	29
17.1 EPG.....	29
17.2 FIND.....	29
17.3 TXT - teletext.....	29
17.4 AUDIO.....	30
17.5 SUBTITLE.....	30

---

17.6 REC - recording.....	30
SEMI-TWIN TUNER.....	31
17.7 PAUSE - time shift.....	31
17.8 INFO.....	32
17.9 FAV - favourites.....	32
ATTACHMENT A - GLOSSARY OF TERMS.....	33
SPECIFICATION.....	34


---

## SAFETY MEASURES


We request that you read the instruction manual and recommendations set forward therein. Also remember to correctly position the satellite antenna!




In order to avoid an electric shock, never open the housing. Damage to the warranty seal shall void the warranty.




Disconnect the device from the mains during thunderstorms or when it is not to be used for an extended period of time. Please remember that the warranty does not cover damage to the equipment caused by a lightning strike.




Do not expose the device to direct sunlight. Place it away from sources of heat and humidity. Do not cover ventilation ducts, in order to ensure the correct circulation of air.




Place the device horizontally on a flat, even and stable surface.



If you move the device from a room that is warm to one that is cold (or vice versa), wait at min. 1 hour before connecting it to the mains. Otherwise, problems may arise.



The device should be placed away from vases, bottles, aquariums and other water containers in order to avoid damage. Do not touch the mains plug with your bare hands.



Do not place any objects on the housing of the device. This may cause overheating and reception problems.

Before commencing maintenance or installation work, disconnect the receiver from the mains. Do not clean the receiver with alcohol or liquids containing ammonia. If necessary, clean it with a soft, lint-free cloth wetted with a gentle solution of water and soap.

- Do not connect any cables when the mains plug is in the socket.
- Check the condition of your cables. Damaged cables may cause a fire.
- Please disconnect the receiver from the mains before connecting any cables.

## DOWNLOADABLE SOFTWARE

Ferguson has taken every effort to provide users with software updates in order to ensure that the parameters of the satellite television receiver are up to date. Ferguson reserves itself the right to amend, change or modify the software used in the satellite television receiver as it shall choose and without prior notification. The latest version of the software is available on the website <http://www.ferguson-digital.eu>

---

## ABOUT THE INSTRUCTION MANUAL

Ferguson has made every effort to provide the most current information about its products. Ferguson does not grant any guarantee as to the contents of the present instruction manual and disclaims any implied guarantees concerning market value or suitability for specific purposes. The information contained herein is an instruction intended to enable the correct usage and maintenance of the receiver.

Ferguson reserves itself the right to introduce amendments, changes or translations of the instruction manual without prior notification thereof. For this reason, we recommend you regularly visit our website in order to obtain the latest information.

## MARKINGS AND SIGNS APPLIED TO THE RECEIVER



### Digital signal transmission logo.

This logo informs that the receiver conforms to the Digital Video Broadcasting standards.



### Risk of electric shock - do not open.

This notice warns the user not to open the receiver housing. The housing may be opened solely by authorised service technicians.



### CE logo.

The logo informs that the receiver conforms to the terms and conditions of Directive 89/336/EEC concerning observance by Member States of provisions regulating electromagnetic compatibility, and to the terms and conditions of Directives 73/23/EEC and 93/68/EEC concerning observance by Member States of provisions regulating low voltage electricity and safety with relation to the handling and operation of electrical equipment.



### Double insulation logo.

This logo informs that the receiver is an electrically safe device, provided that it is used in accordance with the recommendations set forward in the chapter concerning safety.



### Take an active part in protecting the natural environment!

- Your device is made from materials that can be processed or recycled.
- To this end, you should deliver it to a designated collection point.

---

## BASIC INFORMATION ABOUT THE RECEIVER



### 1. Main features

- ✓ Reception of high definition channels
- ✓ Scaling of PAL signals to a resolution of 720p or 1080i
- ✓ Availability of 8 programmable timers
- ✓ Separate lists of favourite, TV and Radio channels
- ✓ Quick channel search function (QuickFind)
- ✓ Teletext and on-screen captions
- ✓ MPEG-2, MPEG-4, MPEG-4 AVC/H.264 standards
- ✓ Compatible with DVB-T

### 2. Contents of box

Unpack the receiver and check whether all of the following elements are present

- ✓ 1 x remote control unit
- ✓ 1 x instruction manual
- ✓ 1 x satellite television receiver

### 3. Important instructions concerning handling of the receiver

The screen menu (OSD) simplifies operation of the receiver and has made it possible to reduce the number of keys on the remote control. All of the functions are displayed on the screen and may be controlled by means of a small number of keys. Common functions have been connected in one "MENU". The selected function is coloured. Depending on the selected option, various "function keys" are displayed: red, yellow, green, blue and white in the form of graphics and descriptions. The colours represent various functions in individual "Menus". The selected function is activated by pressing a key on the remote control unit. The so-called function keys are active only when in the appropriate field there is information about it. The user interface makes it possible to navigate within a menu and between functions in a number of different ways. Certain buttons on the remote control allow direct access to functions. The buttons are multi-functional, i.e. their functions depend on previously activated elements.

#### **NOTE:**



*Please keep in mind that new software may change the functionality of the receiver. Photographs and descriptions included in the instruction manual are for informational purposes only. If you should notice an error, please report it - we shall make every effort to have it rectified.*

## 4. Remote control

Due to the standardization of Ferguson equipment, the majority of these devices use the same remote control unit, i.e. RCU-200. This means that not all keys are used by this equipment model!!


<b>POWER</b>	Turns the receiver on and sets it in standby mode.
<b>MUTE</b>	Switches the sound on and off.
<b>BACK</b>	Returns to the previously displayed channel.
<b>EPG</b>	Displays the electronic programme guide.
<b>MENU</b>	Displays the main menu on-screen.
<b>OPT</b>	Changes the image resolution. The following resolutions are available: 576i, 576p, 720p, 1080i.
<b>USB/PVR</b>	Displays the USB menu, if a USB memory device has been connected.
<b>FAV</b>	Displays a selection of favorite channel lists.
<b>VOL+ VOL-</b>	Used to change the volume level (lower, higher).
<b>CH+ CH-</b>	Switches to the next or previous channel.
<b>INFO</b>	Displays information about the current programme.
<b>EXIT</b>	Returns to the previous submenu, or exits the menu.
<b>TEXT</b>	Switches on the teletext on-screen, if this is available.
<b>AUDIO</b>	Switching between soundtrack versions, if these are available.
<b>SUBTITLE</b>	Switches the on-screen captions on and off, if these are available.
<b>FIND</b>	A quick search for channels according to successive name letters.
<b>EDIT</b>	Not used.
<b>FORMAT</b>	Change the aspect ratio of 16:9, 4:3, etc..
<b>REV, PLAY, PAUSE, FF, STOP, REC</b>	Buttons used to operate the recording, playback and time shift mode functions.
<b>TV/RADIO</b>	Switching between the list of television and radio programmes.





---

#### 4.1 Installation of batteries

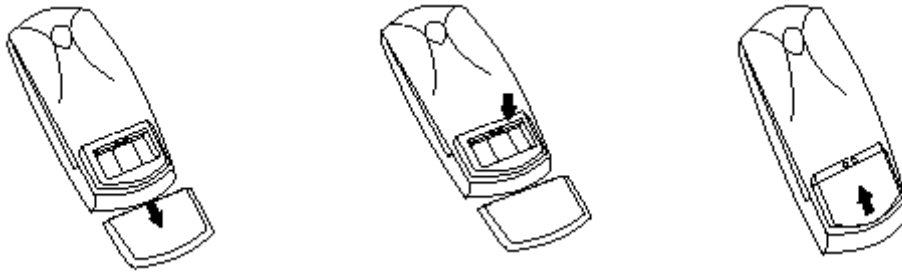

Remove the cover of the battery compartment on the rear panel of the remote control unit; slide it downwards and put it aside. Insert two AAA (R03) batteries into the compartment, observing the indicated polarity. **Do not mix old and new batteries, or batteries of different types.** Replace the battery compartment cover. Slide it upwards until it locks in place.

#### 5. Front panel



- POWER:** Turns the receiver on and sets it in standby mode.
- CH+/CH-:** Switches to the next/previous channel, moves the cursor up/down in the Menu.
- USB:** Port for connecting an external USB memory device.

---


## 6. Rear panel



<b>ANT IN:</b>	Input of the concentric cable from the antenna.
<b>LOOP OUT:</b>	Output signal to another receiver. It is not RF-out.
<b>HDMI:</b>	Digital image and sound output.
<b>COAXIAL:</b>	Digital coaxial audio output.
<b>TV:</b>	SCART output, for connection to a television.

## 7. Connecting an aerial

In order to check the correctness of connection of external equipment, for example a terrestrial antenna, read the installation manual or hire a professional technician!

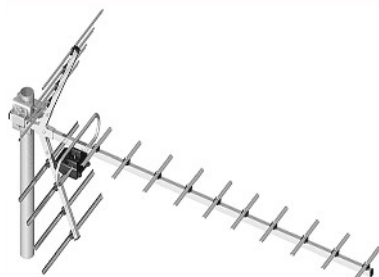

Good reception is conditional on the precise placement of the antenna. Even the best antenna will cause reception problems if it is incorrectly adjusted. Even slight placement errors may render reception impossible or considerably impair image/sound quality. Before installation make sure that the location is suitable. The proper direction may be initially determined by making a comparison with other antennas. There should be no objects directly in front of the antenna, for these may block the signal from reaching the bowl! Once you select an optimal location for the antenna, fix and adjust it initially, and then proceed to a precise adjustment. Each antenna is fitted with regulating screws that make it possible to correct its vertical and horizontal placement.

Adjusting is somewhat more difficult in the case of digital tuners. You cannot perform adjustments on the basis of the image, because this appears with a certain delay. What is more, the indicators available in the settings menu also act with a delay, and therefore adjustment may take considerable time and be very imprecise. An antenna signal meter will be indispensable for setting up the antenna. The meter must be connected to the antenna cable between the antenna and the receiver. We strongly recommend hiring a professional technician!

---


## 8. Connecting the satellite receiver

The following illustrations show cable connections for a television and other devices connected with the receiver. If you require any assistance in connecting individual devices, contact your local technician. Before connecting or altering cabling, disconnect the receiver from the mains !!!


### 8.1 Connection by means of an HDMI cable (recommended)

1. Connect the antenna to the ANT IN socket of the receiver.
2. Connect the HDMI to the receiver out and the television in.

Connection by means of an HDMI cable allows you to obtain the highest image quality.

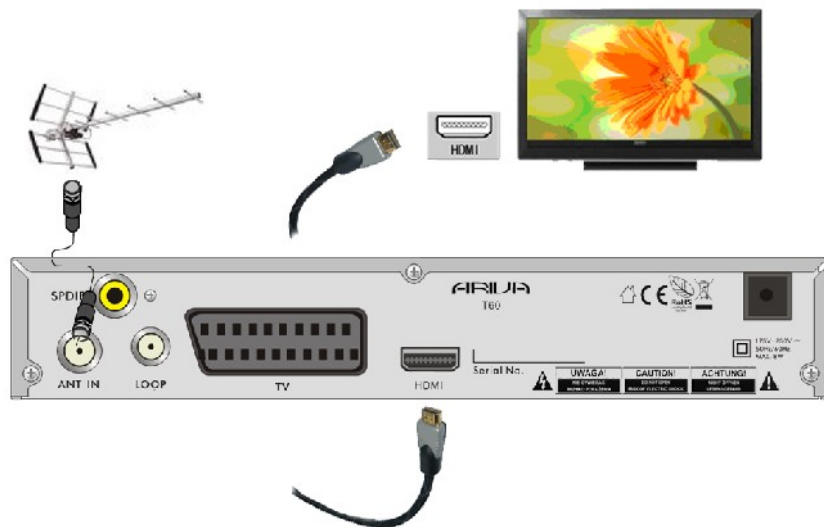


If you have an amplifier with an HDMI out and in, which supports sound sent over HDMI, connect the devices by two HDMI cables. As in the following figure: one cable to the amplifier, and the other from the amplifier to the television set.

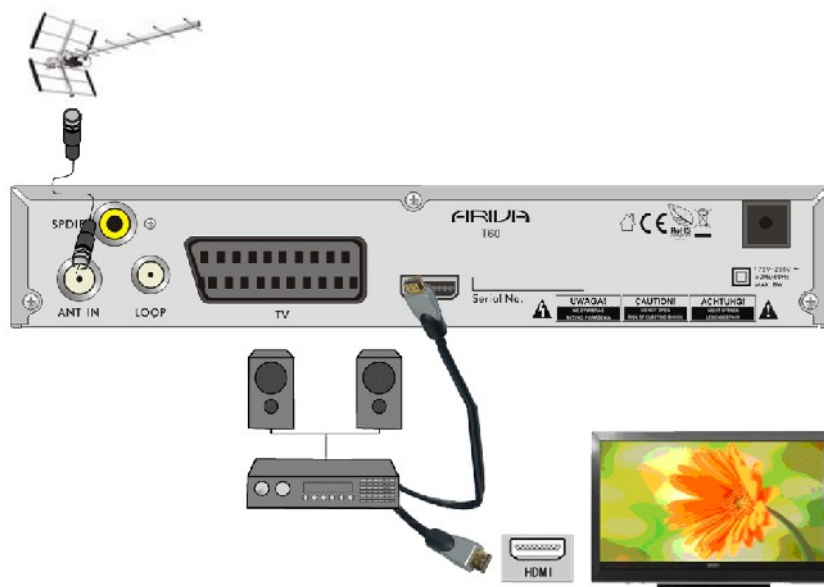

---


## 8.2 Connection by means of SCART cables

1. Connect the antenna to the ANT IN socket of the receiver.
2. Connect the television to the port in accordance with the description. We recommend using shielded SCART cables.

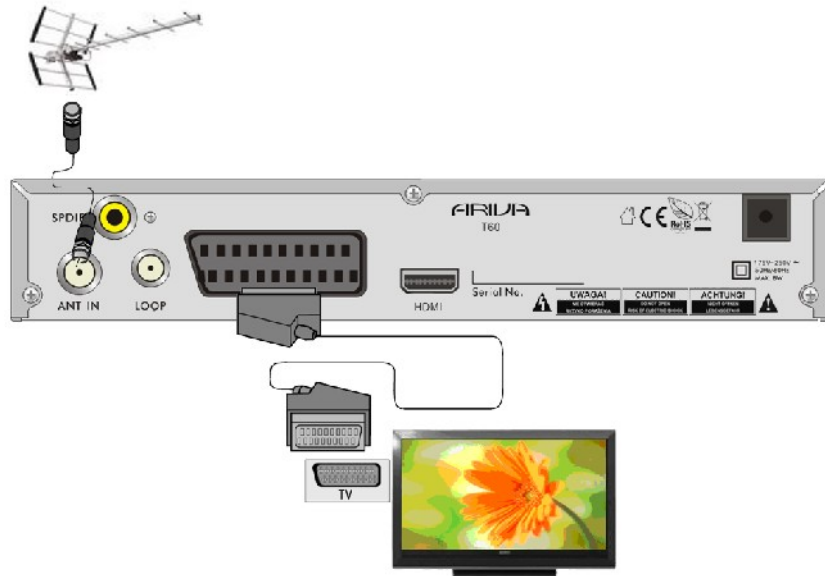

## 8.3 Connection of an audio system

Digital sound (including surround sound, if broadcast) may be obtained through socket: electrical (SPDIF).

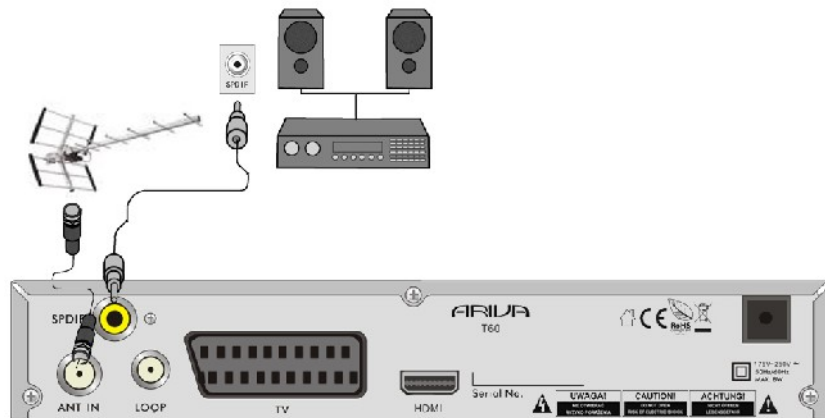

---


## 8.4 Connection of an external memory

1. The receiver supports all types of hard disk drives in housings that are equipped with an independent power supply. The sole condition is that the hard disk has to have a single basic partition that is formatted in the NTSF (recommended) or FAT32 system.
2. We recommend that you regularly archive data on your PC computer. A large number of files with recordings may slow down cooperation with the receiver (slow loading of the file list).
3. Connect the memory through the USB port located on the front panel under a tab.



## 8.5 Connection of another receiver

Another receiver may be connected through the LOOP socket.

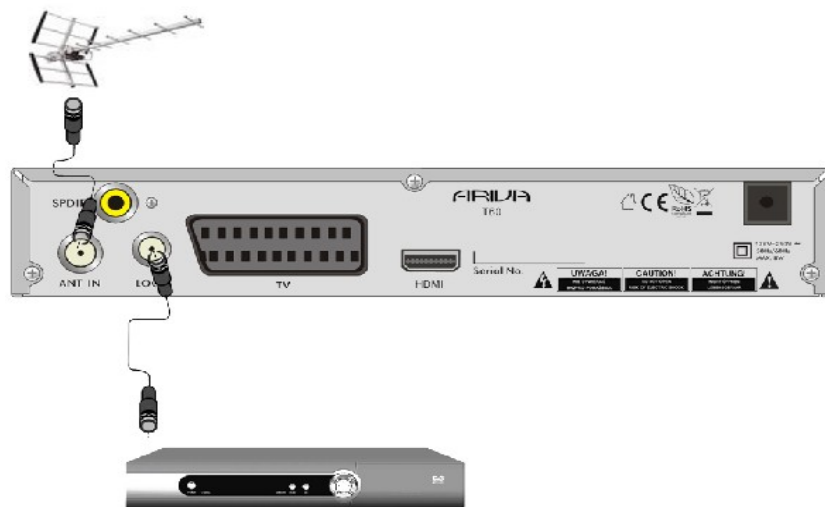

### NOTE

LOOP is the only signal loop-through. This is not a modulator, so the receiver will not let go of the image decoding (DVB-T and USB) in the form of an analog signal on this connector.

---

## FIRST STEPS

1. Insert the plug of the receiver and other additional devices to a wall socket.
2. Select AV signal source of your television set.
3. In order to watch channels, you should use channel search function.



**Note:** check all of the connections, i.e. antenna cables, audio and video signal cables, before connecting the receiver to the mains!

## INFORMATION ABOUT THE USER MENU

The user interface allows you to use numerous settings and receiver functions. Some buttons on the remote control unit enable direct access to functions of the device. Certain of these buttons have been described, for example EPG, MENU, OK, or coloured for ease of usage. Other buttons are multi-functional and their operation depends on the type of device selected by the user. Hereunder we have presented a brief description of how to use certain device functions available through the user menu.

1. The up/down arrow keys on the remote control are used to move the cursor up and down on the menu.
2. The left/right arrow keys on the remote control are used to move the cursor left and right, and to switch on submenus
3. The OK button is used to enter submenus.
4. The EXIT button is used to exit menus or functions.
5. When using a submenu, the OK button is used to confirm your selection; a green background informs that a function is active.

## 10. Main menu

Press the MENU button on the remote control in order to display the following main menu, which contains six items:



- installation
- option
- USB
- tools
- system
- program

## 11. Installation




The installation menu is used to set antenna installation parameters and to search for channels.



- Country- choose your country
- OSD Language- choose your OSD language
- Antenna Power- on/off the antenna power
- Time Offset- on/off the automatic GMT
- Country Region- choose your country region
- Time Zone- manual GMT settings
- LCN- on/off the provider Logical Channel Numbering
- Manual Search- manual channel scan
- Auto Search- automatic channel scan

### 11.1 Auto search

In this menu, you can search for channels automatically - the receiver searches only frequency by frequency according to the saved list of DVB-T. This list can not be edited in a separate menu.

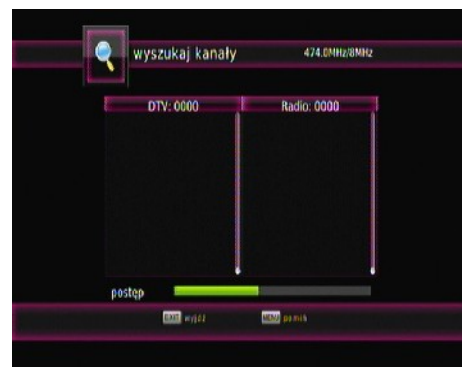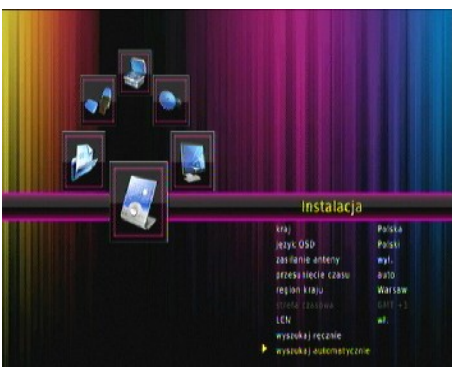


## 11.2 Manual Search

There are two search options manually. Choose the right depending on whether we know the channel or frequency with which it is assigned a channel search.



## 11.3 Language


This menu is used to define the language in which the receiver's menu is displayed. The preferred and second language options refer to audio soundtracks. If a given channel supports more than one audio soundtrack, the receiver will by default search for soundtracks in the selected languages in this order. The language of subtitled – as in the case of audio soundtracks, this determines the language of subtitles to be used, provided that such subtitles are available and active.

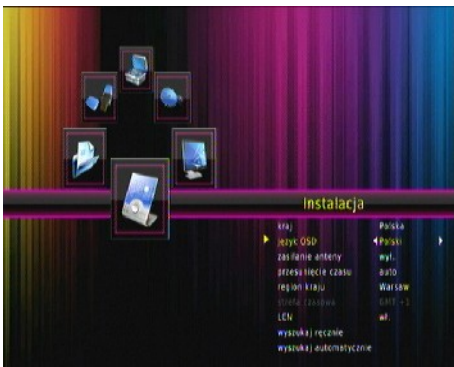

Menu- Installation- OSD Language



Menu- Option- Subtitle Language




Menu- Option- Audio Language



---

## 11.4 Local time settings

This menu is used to set the time and date. The receiver can automatically download the time and date from the satellite (recommended), or you may set the time and date manually. If you are using GMT, you should select the correct time shift value (for example +1 hour for Poland) and turn on or off the summer time, depending on the time of year. The manual editing of the time and date is effected by means of RCU`s arrows.

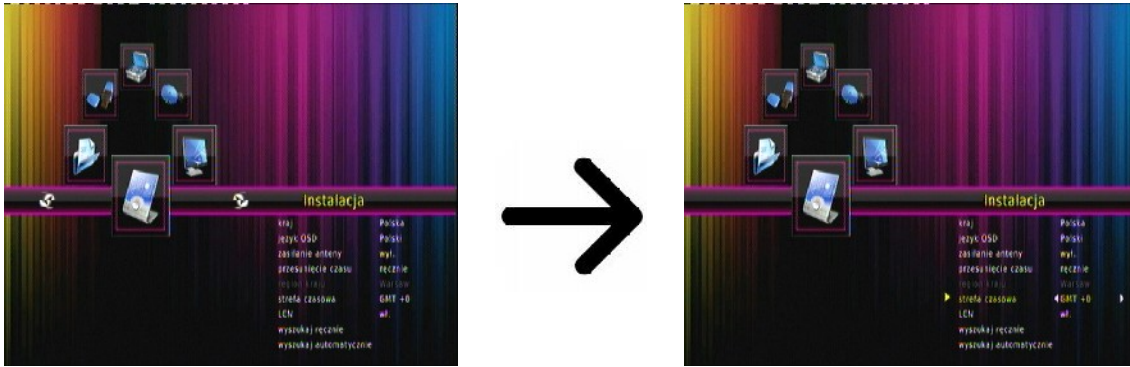


Menu- Installation- Time Zone

---

## 12 TV System

This menu is used to set the image parameters. Above all, you should determine the resolution of the image sent over the HDMI connection. Select the highest possible resolution supported by your HD television set in order to obtain the best image quality.

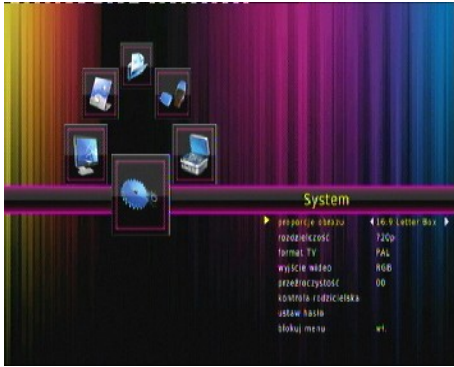

### Aspect ratio

Menu- System- Aspect ratio




### Resolution

Menu- System- Resolution

If you are using a SCART connection, then for the majority of older television sets we recommend setting the video out to CVBS. If your television supports RGB, then activate this option in order to obtain better image quality over the SCART connection.


Additionally, in this menu you can choose the format in which the receiver will send sound over the digital connections. We recommend using LPCM in order to also receive a stereophonic signal over the digital connections.

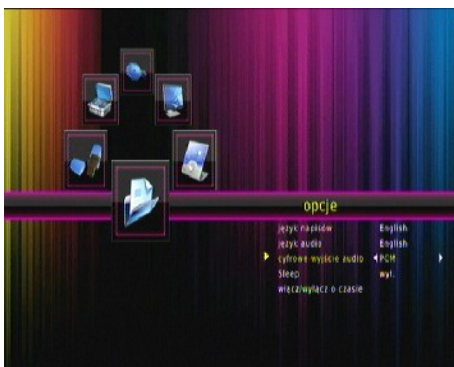

Menu- Option- Digital Audio- PCM/RAW/off


## 12.1 Parental lock

In this menu you may specify whether the receiver is to use a parental block or not. In addition, you can turn on or off the password protection function for selected menu options and change the default password. The default password is four zeros: **000000**.

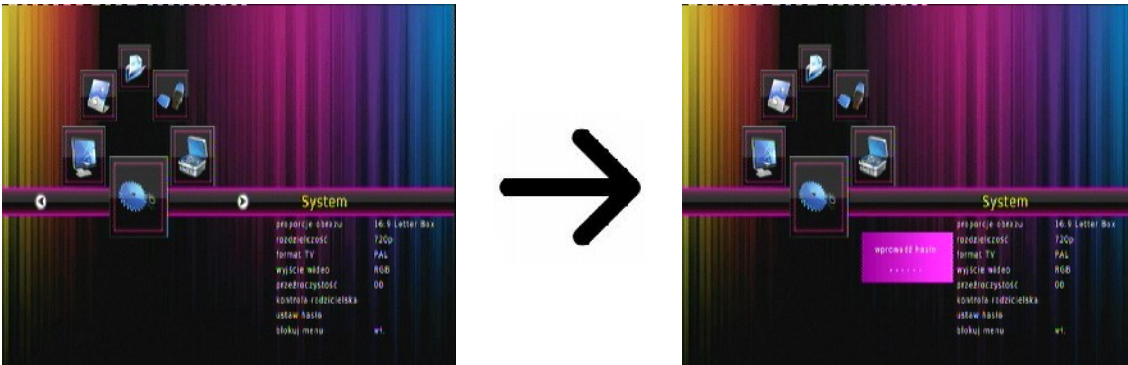

## 12.2 OSD settings

In this menu you can define the transparency of the menu to suit your preference.

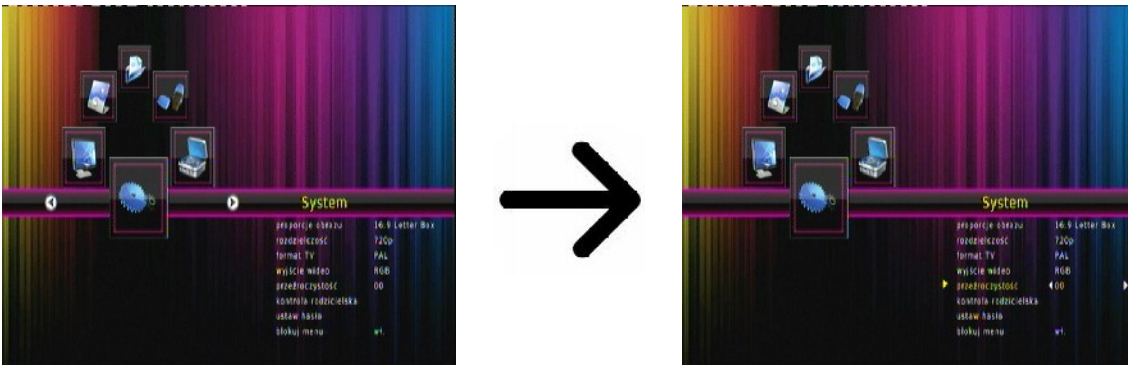

Menu- System- Transparency

---

## 13. Tools

### 13.1 Calendar

This option displays a simple calendar.

### 13.2 Schedule

This option displays a list of scheduled events and set timers.


### 13.3 Games

The receiver has factory-installed games:

- Tetris (classic arranging of successive levels using blocks of various shapes).
- Sudo (the game consists in completing diagrams with numbers from 1 to 9 in such a way that each column and each line contains each number from 1 to 9).
- other games BoxMan, Snakes, Gobang, Jigsaw, Reversi, Sweeping, Black Jack, Ball.

### 13.4 Information

In this menu you can obtain detailed information about your software version.

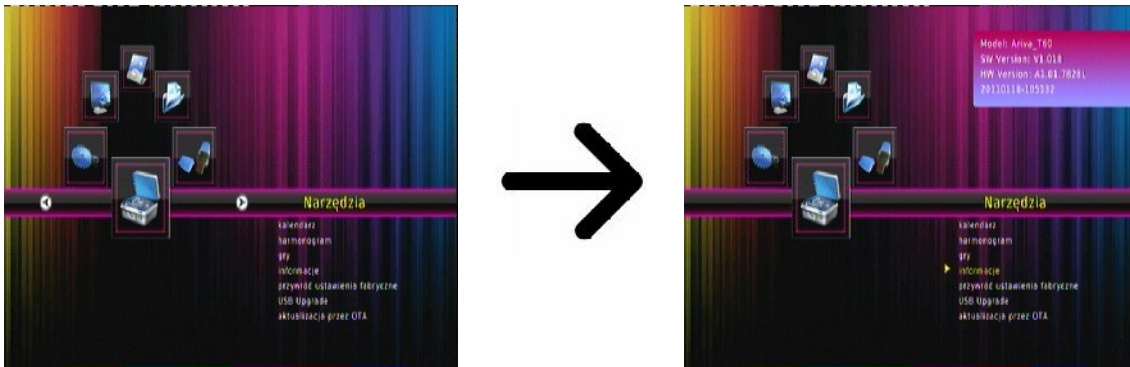


Menu- Tools- Information

### 13.5 Factory settings

In this menu you can restore the default settings of the receiver.




**Note:** Restoration of default settings results in the removal of all user settings and the recall of a default channel list; in some cases, no channel list will be available. All changes introduced by the user, including the channel list and configuration of satellite antenna settings, will be removed!!!

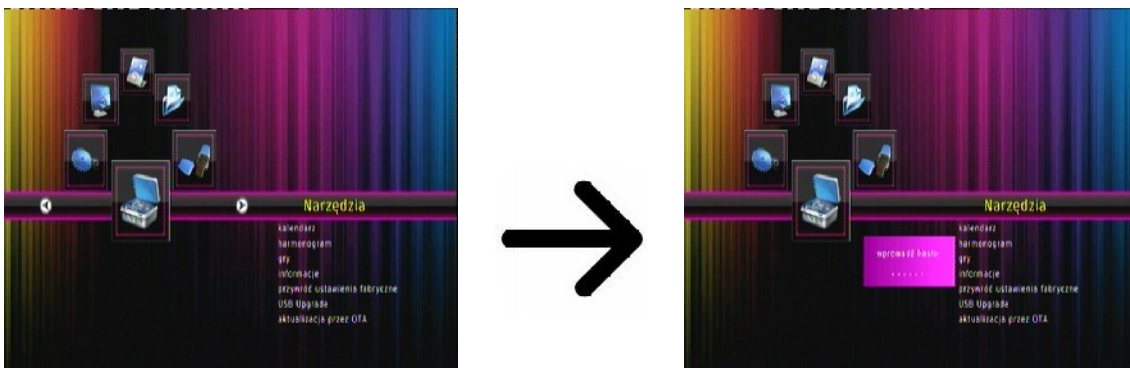

Menu- Tools- Factory settings- PIN **000000**

### 13.6 Upgrade by USB


This menu is used to update the receiver. The latest software is available on the manufacturer's website. The downloaded file needs to be unpacked and recorded to an external USB memory device. Next, select it and press start in order to commence the update.

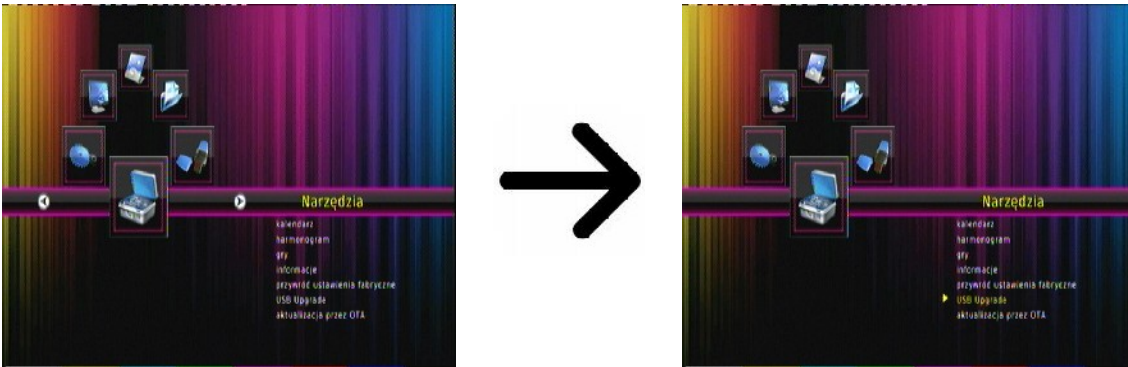


Menu- Tools- USB upgrade

### 13.7 Upgrade by OTA

This function is used to update receiver by OTA directly from the operator signal . This feature will only work if the operator will make it available and give the specific parameters of the update.

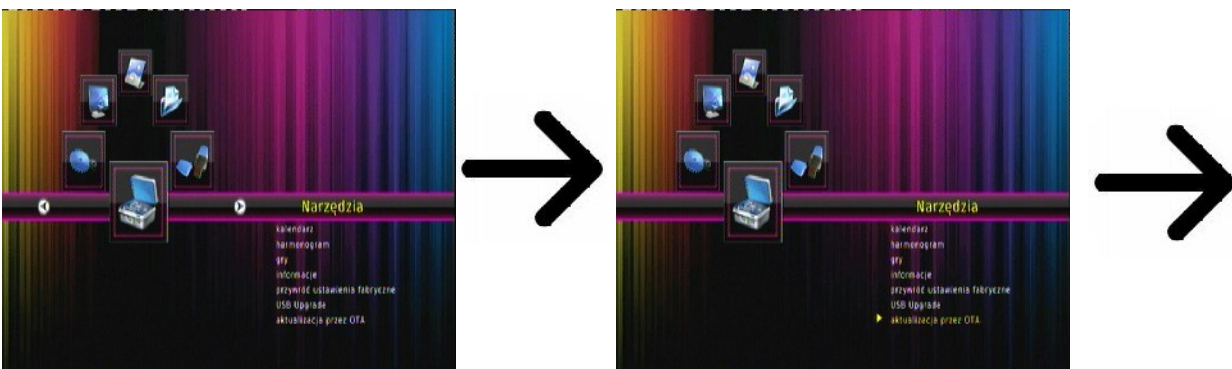

Menu- Tools- OTA upgrade- choose the upgrade values

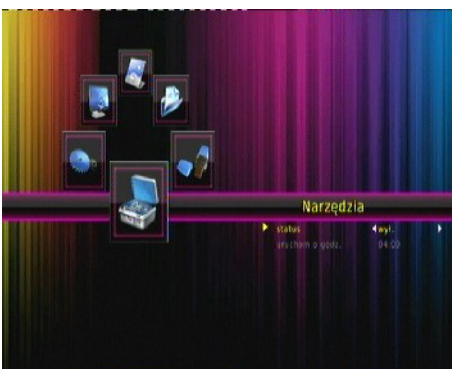

---

## 15. PVR – recording configuration

### 15.1 Recordings

Menu- USB- Multimedia- PVR



This tab is used to play back recordings made using the receiver. Each recording may be blocked by a password, deleted, or its name changed.



Options available during playback (subtitles, teletext, audio soundtracks) depend on the selected recording format!!!

The recordings player is available through a menu option or directly, by pressing the **USB/PVR** button.

During playback, press the INFO button in order to display the information bar. Use the Fast forward and Rewind buttons to navigate within a current recording and press the PLAY button in order to start viewing from a selected moment.

### 15.2 Storage info

This menu displays basic information about the connected USB memory device.

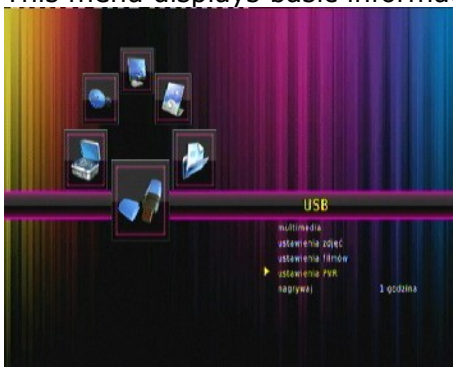


Menu-USB-Ustawienia PVR

An additional option allows you to format the memory device. Press the yellow button in order to select the file system in which the device is to be formatted. Two options are available: FAT and NTFS. Both file systems are supported correctly, however due to the lack of limitations regarding the size of written files and greater reliability, we recommend using the NTFS system.

### 15.3 TimeShift


In this menu you can adapt preferences concerning recording to an external USB memory device. In the first option you decide whether you want to use the time shift option. This mode makes it possible to stop the current transmission at any moment by pressing the **PAUSE** button and resume it after a break by pressing the **PLAY** button.

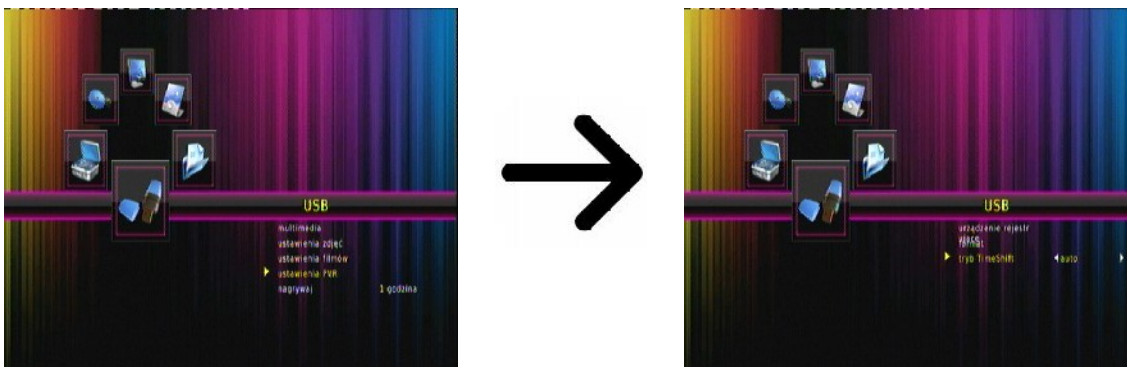

Menu- USB- PVR Configure- TimeShift


### 15.4 Timer settings

This menu serves to programme up to 8 different events. Events enable the automatic switching on and off of the receiver to a previously planned programme.

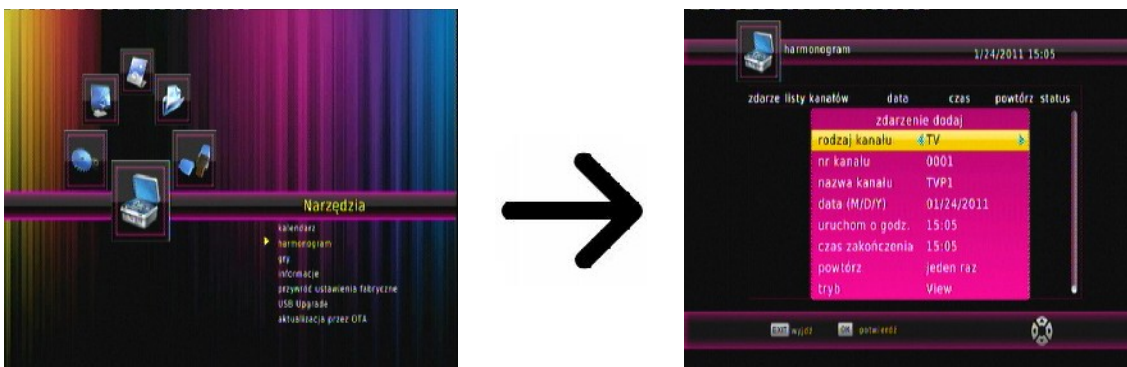

Menu- Tools- Schedule- red RCU button to add the timer event

In next steps please set the start time and the duration. Please save the timer.

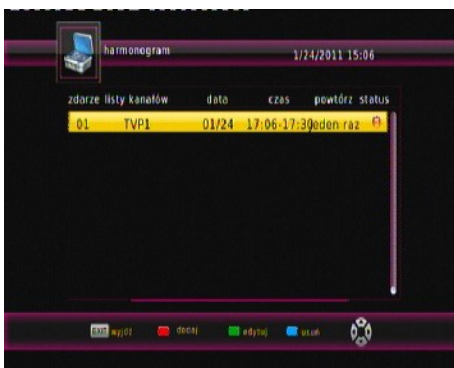

---

## 15.5 Media Player

The receiver is equipped with a simple multimedia player. You can use it to listen to music, watch photographs and films.



There are a few additional functions that can be operated by means of the functional keys described in the lower part of the screen.



*When viewing photographs, you may listen to music. To this end, activate the playback of music files and pass to the photograph tab using the EXIT button.*

### CAUTION !!!

- Playback of some files may fail or be incorrect.
- Copy protected content is not playable.
- Playback may suffer temporary interruptions (image freeze, faster/slower playback, etc) when the audio language (audio track) is changed.
- A damaged movie file may not be played correctly.
- Videos with resolution higher than 1920x1080@25/30P or 1280x720@50/60P may not work properly.
- We do not guarantee smooth playback of movies encoded in profiles level 4.1 or higher in H.264.
- Playback of movie files with video bitrate over 30 Mbps may be incorrect.



## 16. Edit channels

### 16.1 TV channels list

Menu- Program- TV List- PIN **000000**

In this menu you can edit the list of television channels. Editing is effected by means of the coloured buttons on the remote control unit. Select **OK** on the selected channel in order to use it. **EXIT**, in order to save.



### *How do I move a channel?*

Proceed to the editing of channel lists. Select a channel and press OK in order to see a preview in a small window. Press the red button in order to turn on the channel movement function and then once again press OK on the selected channel. A symbol comprising two arrows will appear next to the channel name.



Use the up/down arrows to move the channel to a selected position and confirm by pressing OK.



Once you are finished, press EXIT. A message will appear asking you to confirm the changes made. If you fail to do this, changes in the channel list will not be saved.

## How do I delete a channel?

Proceed to the editing of channel lists (Menu- Program- TV List- PIN **000000**). Select a channel and press **OK** in order to see a preview in a small window. Press the blue button in order to switch on the channel delete function and **OK** on the channel that you want to remove.



Once you are finished, press **EXIT**. A message will appear asking you to confirm the changes made. If you do not do this, the channel(s) will not be deleted.

## How do I add to the group of favourites?

Proceed to the editing of channel lists (Menu- Program- TV List- PIN **000000**). Select a channel and press **OK** in order to see a preview in a small window. Press the **FAV** button in order to switch on the add-to-favourite-groups function. A window will appear with a list of favourite groups (names of favourite groups are changed in a separate menu).




Use the up/down arrows to select the group to which the selected channel is to be added. Next press **OK** to confirm. Select a channel and press **OK** on this channel in order to add it to the group. The heart symbol, ♥, will appear next to the channel name.



Having completed the addition of channels to successive favourite groups, press **EXIT**. A message will appear asking you to confirm the changes made. If you fail to do it, the changes made will not be saved!

## How do I change a channel name?


Proceed to the editing of channel lists (Menu- Program- TV List- PIN **000000**). Select a channel and press **OK** in order to see a preview in a small window. Press the **EDIT** button in order to switch on the channel name change function. Use the virtual keyboard in order to change the channel name.

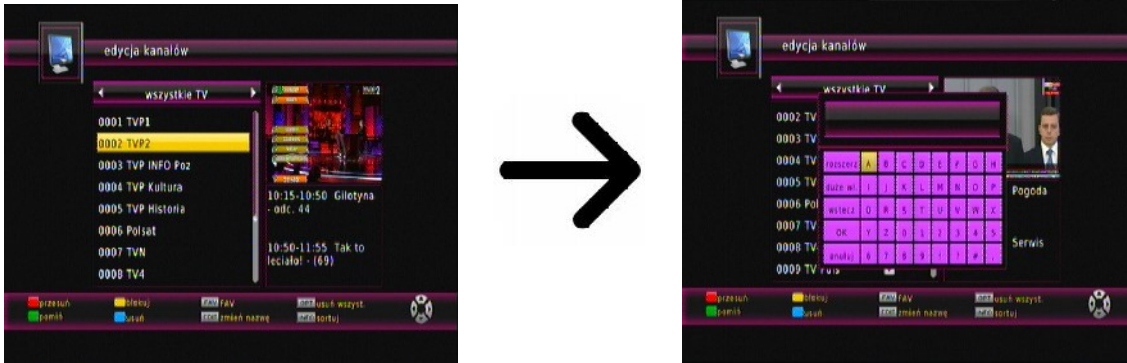

Confirm the new name by pressing **OK** (use the virtual keyboard). Once you are finished, press **EXIT**. A message will appear asking you to confirm the changes made. If you fail to do it, the changes made will not be saved!


## 16.2 Radio channel list

In this menu you can edit the list of radio channels (Menu- Program- Radio List). Editing is effected by means of the coloured buttons on the remote control unit. The raised colour function is active - select **OK** on the selected channel in order to use it. **EXIT**, in order to save.

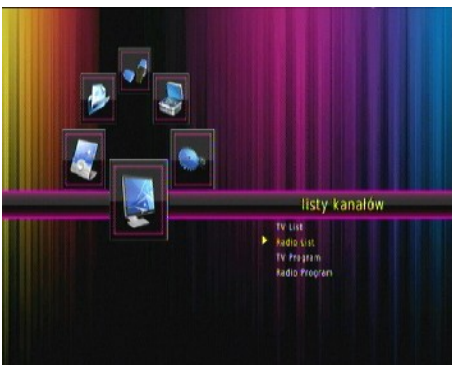


## 16.3 Favorite

The receiver allows you to define up to 8 different groups of favourite channels. In this menu you can change the names of all of them.

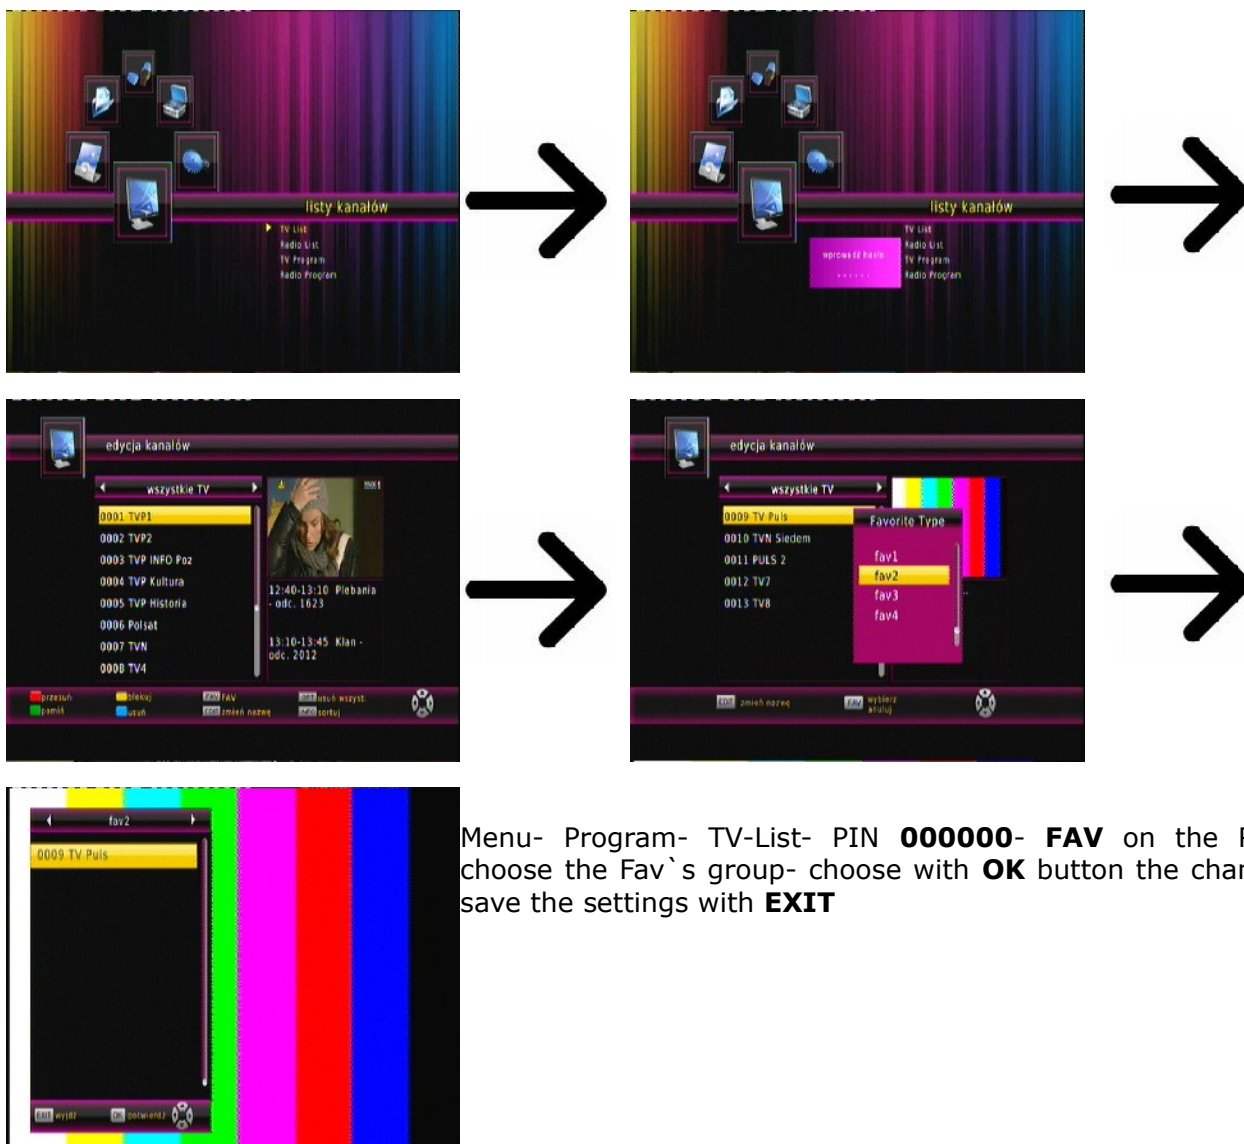


To rename a select group of favorites and press EDIT. Is followed by using the virtual keyboard, enter the name. Save the changes by pressing OK key on your virtual keyboard.

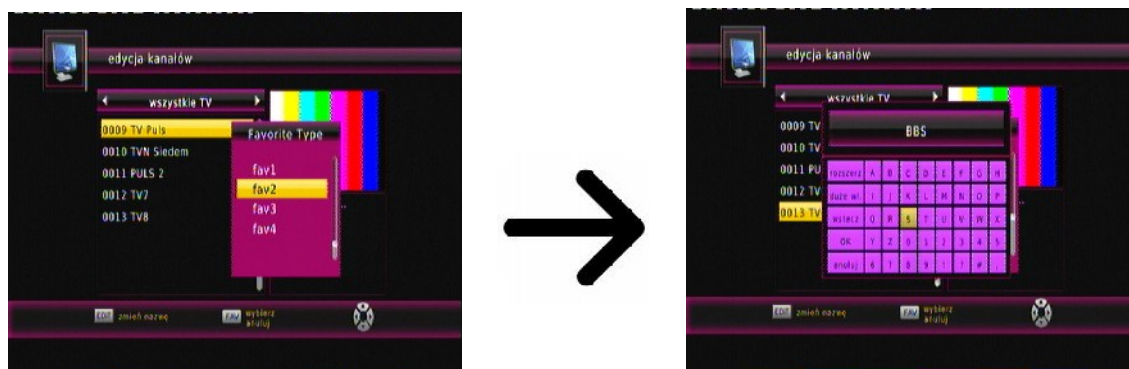

## 17. Basic functions supported by the remote control

### 17.1 EPG

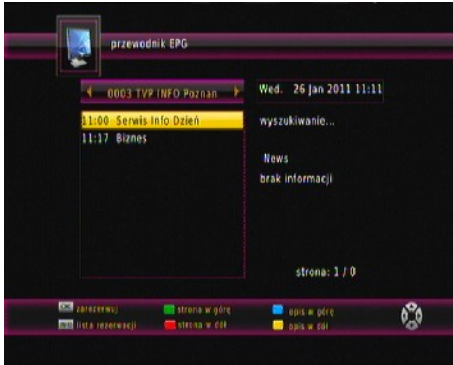

This function displays a programme guide. The contents of current, future and detailed information depend on what a given station broadcasts.

Having selected a programme, you can use the timer function (**OK** button) to automatically plan the viewing or recording of a given programme.

### 17.2 FIND



The FIND button calls up the quick channel search function. Enter successive letters by choosing them one by one. The results list is updated after each successive letter is added. Press the EXIT button in order to proceed to the list containing results of the search procedure and select the desired channel.

### 17.3 TXT - teletext



This function displays the teletext, provided that it is broadcast by the selected television station. Keep in mind that the correct code page (diacritical marks) is displayed depending on the language settings made in the language settings menu!

## 17.4 AUDIO



The green audio button displays a window with available audio soundtracks. You can select any of the broadcast soundtracks. Please keep in mind, however, that audio soundtracks with AC3/DD+ surround sound may be played back solely through an amplifier connected to the digital audio out – Coaxial.

This function is also available when playing back a recording. Audio soundtracks other than those recorded by default will be available during playback only if they are not scrambled.

## 17.5 SUBTITLE



The yellow button displays a window with available on-screen captions /subtitles. You can select any of the broadcast subtitles. If subtitles for a given language have been activated in the menu, these will be marked as default on the list. You can, however, select any of the broadcast subtitles. Keep in mind that the availability of subtitles and the way in which they are displayed depends on the broadcaster!

This function is also available when playing back a recording.

## 17.6 REC - recording

 *This function is available only when an external USB memory device is correctly connected!!!*



1. Select a channel and press the REC ● button. The present channel will now be recorded.

2. If you press the REC button again, a list of options will be displayed, where you can determine the duration of the recording (by default, this is 1 hour).

3. In order to terminate recording, press the STOP button and confirm your decision.

 *Keep in mind that during recording, the information bar may be hidden by means of the EXIT button. In order to restore the bar, press REC again.*

### **Browsing through a recording – during recording.**

1. The contents of a recording are available for browsing in the course of recording.

2. Use the Fast forward and Rewind buttons to navigate within a current recording and press the PLAY button in order to start viewing from a selected moment.

---

## SEMI-TWIN TUNER

The receiver is equipped with a so-called SEMI-TWIN TUNER; during recording, this function allows you to watch a different channel broadcast on the same frequency.



1. When recording a channel, press OK in order to display a list of channels available from this transponder.
2. You can stop recording at any time by pressing the STOP button.

### 17.7 PAUSE - time shift




 *This function is available only when an external USB memory device is correctly connected!!!*

The time shift mode allows the user to control the television broadcast by "pausing" and then resuming it from the same point. From the moment you switch on the time shift mode, the Ferguson receiver will constantly record the signal from the satellite in a buffer. The buffer is created automatically on the external USB memory device.



#### Pausing the television broadcast

1. Press **PAUSE**
2. The time elapsed bar will now be visible on the screen
3. Press the **PLAY** button in order to resume the television broadcast. The Ferguson receiver continues to record the television broadcast when viewing the previously broadcast programme.

 *Keep in mind that during buffer playback, the information bar may be hidden by means of the EXIT button. In order to restore the bar, press PAUSE/PLAY again.*

## Scrolling the contents of the time shift buffer (playback of an earlier television broadcast)

2011		za użyczenie odbiorników:	
	radiologicznego	telewizyjnego	za użyczenie odbiorników: radiologicznego i radiologicznego
za jeden miesiąc	8,35 zł	17,15 zł	
za dwa miesiące	10,45 zł	23,45 zł	
za trzy miesiące	15,50 zł	49,65 zł	
za sześć miesięcy	30,65 zł	98,25 zł	
za rok	58,75 zł	188,70 zł	

1. Switch on the time shift mode by pressing PAUSE.
2. The contents of the time shift buffer can now be scrolled through.
3. Use the Fast forward and Rewind buttons to navigate through the time shift buffer and press PLAY in order to start playback.

## Switching off the time shift mode

Switch off the time shift mode by means of the STOP button.

 *Keep in mind: when no external memory device is connected to the USB port, the PAUSE button is used to temporarily pause the image, i.e. freeze-frame.*

## 17.8 INFO



Pressing the INFO button will call up the information bar for the current channel. This contains information about the current and next programmes (if such information is made available by the broadcaster)

If you press it twice, the receiver will display detailed information about the current and next programme – provided that such information is made available by the broadcaster.

## 17.9 FAV – favourites



If you press the FAV button, the receiver will display a window with groups of favourites (provided that the user has created such groups). Select group by pressing the LEFT/RIGHT buttons.



---

## ATTACHMENT A - GLOSSARY OF TERMS

**CA - Conditional Access** – a coding system used in order to protect transmitted data against unauthorised access. Access to protected channels is available only to subscribers.

**CAM - Conditional Access Module** – an electronic device, usually fitted with card slots, that allows access to coded pay-per-view channels on a receiver equipped with a CI socket.

**CI - Common Interface** – CI sockets of digital receivers are used for the installation of CAM conditional access modules, and thus allow you to view coded pay-per-view channels through these modules.

**DVB-S** the Digital Video Broadcasting standard that defines modulation and error correction in satellite transmissions. In DVB-S, both the MCPC and SCPC modes can be used by the operator to transmit channels. MPEG-2 is used as the transport stream.

**EPG - Electronic Programme Guide** – a service that displays detailed information about current and future programmes on the television screen.

**FTA - Free-to-air** – unencoded radio and television channels that may be received on any television set.

**LNB - low-noise block converter** – a converter - it converts satellite signals, and then sends them to the tuner through a coaxial cable. The basic parameters are: gain, noise factor and power consumption.

**MCPC - multiple channels per carrier** – more than one signal (channel) is transmitted on a given frequency (transponder). All of these channels comprise a single data stream, which is transmitted on one frequency following modulation.

**Monoblock** – a device that comprises two converters and a DiSEqC switch in a single housing, which receives signals from two satellites on similar orbits.

**Pay-TV** – Pay-per-view digital television, to which only subscribers have access. The service is provided by satellite, cable, over the ground or through the network.

**SCPC** - Single channel per carrier – only one signal (channel) is transmitted over a given frequency (transponder).

**STB - Set-top box** – an electronic device connected to the television set, which processes the signal received from the ground-based, cable or network satellite antenna. It enables the playback of video and sound.

**TP - Transponder** – a type of wireless communication device (transmitter), which automatically receives, modulates, strengthens and responds to a signal coming in real time over a specific frequency. The term is derived from the words "transmitter" and "responder". Usually, each transponder transmits numerous compressed digital channels.

**DiSEqC - (Digital Satellite Equipment Control)** a communication protocol, used between a satellite receiver and equipment such as switches or positioners, which supports switching between television signal sources and antenna control.

**USALS - (Universal Satellites Automatic Location System)** – a communication protocol used between satellite receivers and positioners, which makes it possible to control the positioner through the receiver. Used in connection with the DiSEqC 1.2 protocol.

---

---

## SPECIFICATION

<b>Main Features</b>	
STB Type	DVBT Receiver
Main Chipset	MSTAR 7828
<b>Special Features</b>	
Encrypt	ASIC Type
TUNER Type	Onboard Design
Demodulator Type	Onboard Design
SMPS Type	Separate SMPS
<b>Mechanical</b>	
Dimension	W : 22.0 cm , D : 12.2 cm , H : 3.8 cm
Net Weight	0.7 kg
<b>Main Chip Sets</b>	
CPU frequency	400MHz
Flash Memory	1PC 32Mbit/4Mbyte
SDRAM Memory	1PCS 32MX16bit/64Mbyte DDRs
<b>DVBT Tuner</b>	
Tuner Type	Onboard Tuner
Frequency Range	177.5 ~ 227.5MHz ; 474 ~ 858MHz ;
Input Impedance	75Ω
Active Ant Power	5VDC @ 50mA MAX,Overload Protection
Input Level Range	64QAM:-78.5dBm~-8.75dBm~16QAM:-84.1dBm ~ - 8.75dBm ; QPSK:-90.3dBm ~ - 8.75dBm
ANT Loop-Through	51MHz ~ 858MHz full Band loop through
<b>TS Demux</b>	
Demultiplexer	MPEG2 ISO/IEC 13818-1
Input Bit Rate	Max 100Mbit/s
<b>Video Decode</b>	
Video Decode	MPEG2 ISO/IEC 13818-2 MP@ML, H.264(MPEG4 part 10) main and high profile level 4.1/MPEG-2 MP@HL
Aspect Ratio	4:3, 16:9
Video Resolution	1920×1080,1280×720,720×480
<b>Audio Decode</b>	
Audio Decode	MPEG-1 layerI/II, MPEG-2 layer II, MPEG-2, MPEG-4 LC 2ch/5.1ch
Sampling Frequency	32KHz, 44.1KHz, 48KHz
<b>AV Output</b>	
Video Bandwidth	SD:5.0MHz(-3dB),HD:30MHz(-3dB)
Video Impedance	75Ω
Video Voltage Level	1.0 Vp-p
Audio Freq. Range	20 ~ 20KHz
Audio Impedance	600Ω
Audio Voltage Level	2V rms(5.6Vp-p)
<b>Environment</b>	
Input Voltage	AC 175~250V~50Hz/60Hz
Consumption	Max 8W
Temperature	0~40
Humidity	<95%

---

[www.ferguson-digital.eu](http://www.ferguson-digital.eu)

v4.06