





FM | DAB+ | BT  
digital radio  
with bass reflex

- Monophonic DAB/DAB+/FM/  
Bluetooth radio
- Bass Reflex
- Bluetooth 4.2 support
- RDS support
- Two time alarms
- 2.4 inch TFT color screen with  
backlight adjustment
- One speaker (5W RMS)
- Modern, stylish design
- Station programming
- Audio frequency: 20-20 KHz
- FM frequency: 87.5-108 MHz
- DAB frequency: 174.928-239.200 MHz
- Power adapter: 9V 1A DC (included)



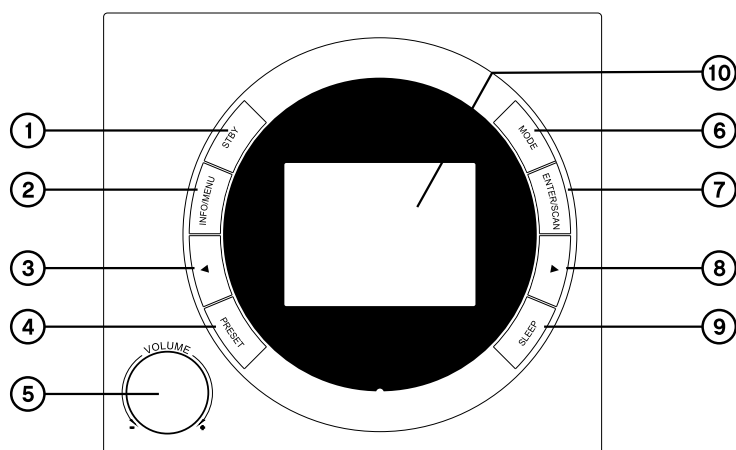

front panel

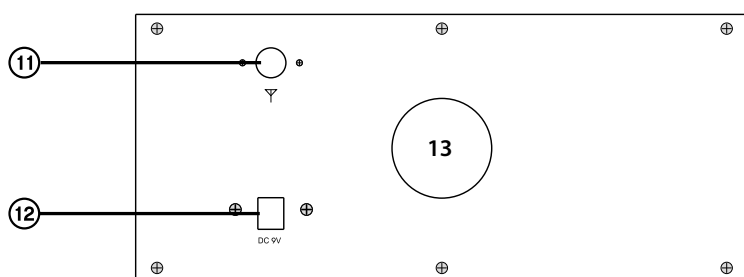


rear panel

## Inputs/Outputs

1. **STBY (STANDBY)** button
2. **INFO/MENU** button
3. **PREVIOUS ◀** button
4. **PRESET** button
5. **VOLUME +/-** button
6. **MODE** button
7. **ENTER/SCAN** button
8. **NEXT ▶** button
9. **SLEEP** button
10. Display screen
11. Telescopic antenna
12. DC power input: DC 9V
13. Bass Reflex

## Technical Specifications

- DAB Tuner+/FM/Bluetooth
- Waveband: FM and DAB+
- FM radio frequency: 87.5 to 108 MHz
- Digital radio frequency: 174.928 to 239.200 mHz
- Frequency range: 2402mHz - 2480mHz
- Power emitted: 0.5mW
- Screen with LCD display: displays the name of the station and the text (RDS) broadcast by the radios
- 60 station memory with automatic tuning. Up to 20 favorite stations can be stored manually.
- Sound power: 5W
- Telescopic antenna
- Bluetooth version: 4.2
- Bluetooth range: 7 meters
- Mains power supply
  - Model: FJ-SW126K0901 000DE
  - Input: 100-240V, 50/60Hz, 0.4A max
  - Output: 9V 1A
- Dimensions: 260 x 145 x 135mm
- Weight: 1.8 kg



5 907115 003634 >

**color:** black  
**EAN:** 5907115003634  
**packaging:** 4 pcs.