

 **FERGUSON**

REGENT® P1

stereo bass reflex

perfect for holiday trips
in three attractive colors






grey

silver

golden

- DAB, DAB+ and FM with RDS
- Supports Bluetooth sound transmission from other devices
- USB - media playback from and charging function of connected devices
- Up to 12 hours of work on the battery (4000 mAh)
- Readable LCD display
- Intuitive controls
- Digital alarm clock function with sleep and snooze settings
- 2x15 RMS, 30 W music power
- Two stereo speakers with high dynamics
- AUX IN input
- Headphone jack 3.5 mm

FM | DAB+
BT | USB

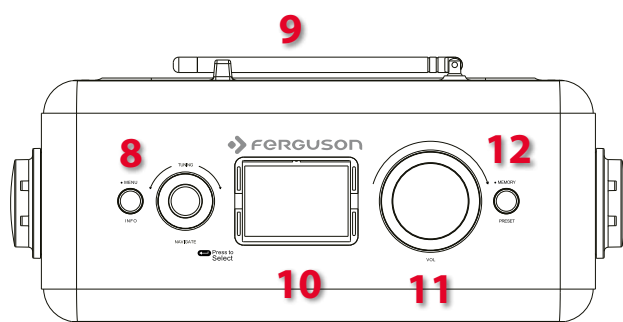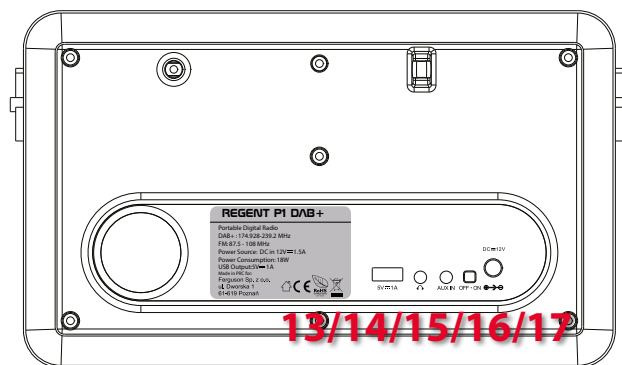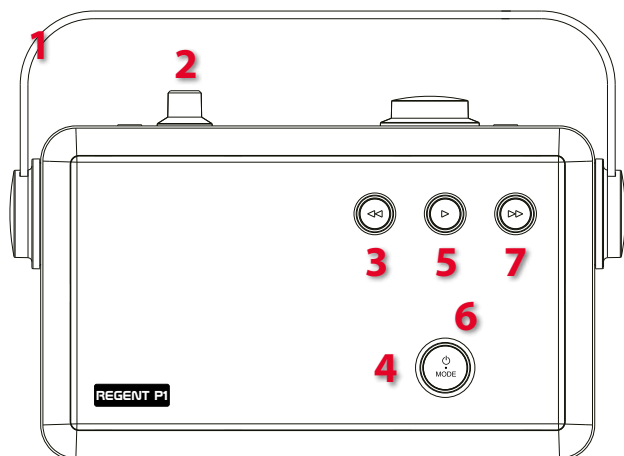

Inputs/Outputs:

1. Solid, metal handle for carrying
2. TUNING knob / SELECT button
3. REVERSE button
4. Device operation mode button
5. PLAY button
6. Battery charging LED
7. FORWARD button
8. MENU / INFO button
9. Telescopic antenna
10. Display
11. Volume knob
12. MEMORY / PRESET button
13. USB port
14. Headphone output
15. 3.5 mm audio input (AUX In Jack)
16. Main on/off switch
17. 12 V power supply input

EAN

silver: 5907115003023

grey: 5907115003092

golden: 5907115003085

Packaging:

Packaging: **6 pcs.**

Technical Specification:

- Portable radio receiver DAB+/DAB/FM RDS
- Radio frequency DAB: 174.928-239.2 MHz
- FM radio with RDS function (frequency: 87.5-108 MHz)
- 40 programmable stations (20 DAB+, 20 FM)
- Bluetooth V2.1+EDR with A2DP, AVRCP
- Built-in USB port for playing MP3 files
- Aux-in socket 3.5 mm
- Headphone jack 3.5 mm
- LCD Dot-matrix display with black backlight
- Dual Alarm clock with Snooze function
- Sleep timer
- Metal, durable, secure handle
- Output power (RMS): 2x15W
- Two stereo speakers with high dynamics
- Built-in lithium battery (7.4 V, 4000 mAh)
- Up to 12 hours of work on the battery
- Power adaptor (included): input: 100-240V, output: 12V 1.5A
- Dimensions (width x depth x height): 278 x 110 x 208 mm
- Net weight: 1,7 kg