





Internet Radio with DAB/DAB+/FM/Bluetooth

- DAB, DAB+ and FM with RDS
- Easy access to more than 16 thousand Internet radio stations
- Internet radio with Wi-Fi connectivity
- Wireless transfer of audio files with DLNA PC or Mac
- Transferring sound via Bluetooth
- Large LCD display
- Intuitive controls
- The digital alarm clock
- Sleep function
- AUX IN
- Headphone output 3.5 mm
- Line Out
- Remote control included

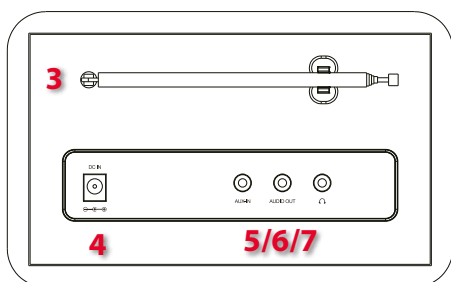

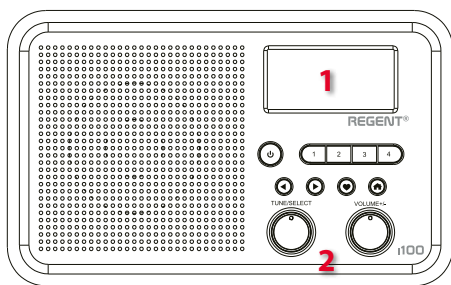

Inputs/Outputs

1. **LCD Display**
2. **Control Buttons Panel**
3. **Telescopic Antenna**
4. **DC In**
5. **3.5mm Jack Audio Input**
6. **Audio Output 3.5mm Line Out**
7. **3.5mm Headphone Output**

Technical Specification

FM Tuner

- RF Frequency Range: low-end 87.5MHz
- RF Frequency Range: high-end 108MHz
- RF Sensitivity: $\leq 22\text{dBu}$
- Signal to Noise: $\geq 40\text{dB}$
- Frequency Response: 100Hz-6KHz $\pm 3\text{dB}$
- RMS Output Power: 1.2W at DC=5V RL=4 Ω THD $\leq 1\%$
- Max Output Power: 2W at DC=5V RL=4 Ω THD $\leq 20\%$
- HUM at MIN Volume: $< 5\text{mV}$

DAB Tuner

- RF Frequency Range: low-end 174.928MHz
- RF Frequency Range: high-end 239.2MHz
- RF Sensitivity: $\leq 42\text{dB 1M}$
- Signal to Noise: $\geq 45\text{dB}$
- Frequency Response: 100Hz-6KHz $\pm 3\text{dB}$
- RMS Output Power: 1.2W at DC=5V RL=4 Ω THD $\leq 1\%$
- Max Output Power: 2W at DC=5V RL=4 Ω THD $\leq 20\%$
- HUM at MIN Volume: $< 5\text{mV}$

Bluetooth

- Bluetooth Version: v4.2
- Transmission Range (Open Area): 10m
- Frequency Response: 100Hz-6KHz $\pm 3\text{dB}$
- RMS Output Power: 1.5W at DC=5V
RL=4 Ω THD $\leq 10\%$
- Max Output Power: 2W at DC=5V RL=4 Ω THD $\leq 20\%$
- HUM at MIN Volume: $< 5\text{mV}$

Internet Radio

- RF Frequency: 2.4GHz
- Transmission Range (Open Area): 10m
- Signal to Noise: $\geq 45\text{dB}$
- Frequency Response: 100Hz-6KHz $\pm 3\text{dB}$
- RMS Output Power: 1.2W at DC=5V RL=4 Ω THD $\leq 1\%$
- Max Output Power: 2W at DC=5V RL=4 Ω THD $\leq 20\%$
- HUM at MIN Volume: $< 5\text{mV}$

Power Supply

- DC Adapter: AC ~100V-240V -5V
1000mA Switching Power
- Speaker: 4 Ω 5W 3-inch

Environmental

- Working Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 60°C



EAN: 5907115003405
Packaging: xx pcs