

**FERGUSON**



**REGENT® i100**  
stereo bass reflex



## Internet Radio con DAB/DAB+/FM/Bluetooth

- DAB, DAB+ e FM con RDS
- Accesso facile a più di 16 mila stazioni radio su Internet
- Connessione WiFi con radio internet
- Trasferimento wireless di file audio DLNA da PC o Mac
- Trasferimento del suono tramite Bluetooth
- Ampio display LCD
- Controllo intuitivo
- Sveglia digitale
- Ingresso AUX IN
- Uscita cuffie 3,5 mm
- Line Out
- Telecomando incluso



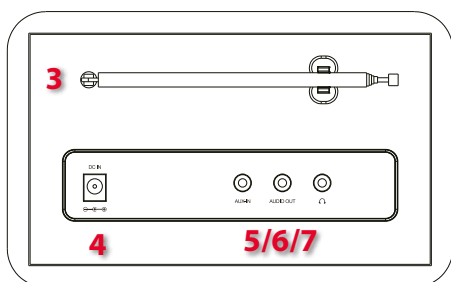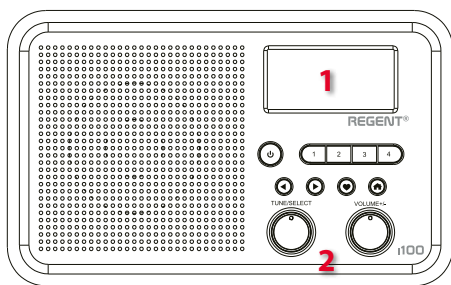

### Entrate/Uscite

1. **Display LCD**
2. **Pannello dei pulsanti di controllo**
3. **Antenna telescopica**
4. **DC In**
5. **Ingresso audio Jack da 3,5 mm**
6. **Uscita audio Uscita da 3,5 mm**
7. **Uscita cuffie da 3,5 mm**

## Specifica tecnica

### FM Tuner

- RF Frequency Range: low-end 87.5MHz
- RF Frequency Range: high-end 108MHz
- RF Sensitivity:  $\leq 22\text{dBu}$
- Signal to Noise:  $\geq 40\text{dB}$
- Frequency Response: 100Hz-6KHz  $\pm 3\text{dB}$
- RMS Output Power: 1.2W at DC=5V RL=4 $\Omega$  THD  $\leq 1\%$
- Max Output Power: 2W at DC=5V RL=4 $\Omega$  THD  $\leq 20\%$
- HUM at MIN Volume:  $< 5\text{mV}$

### DAB Tuner

- RF Frequency Range: low-end 174.928MHz
- RF Frequency Range: high-end 239.2MHz
- RF Sensitivity:  $\leq 42\text{dB 1M}$
- Signal to Noise:  $\geq 45\text{dB}$
- Frequency Response: 100Hz-6KHz  $\pm 3\text{dB}$
- RMS Output Power: 1.2W at DC=5V RL=4 $\Omega$  THD  $\leq 1\%$
- Max Output Power: 2W at DC=5V RL=4 $\Omega$  THD  $\leq 20\%$
- HUM at MIN Volume:  $< 5\text{mV}$

### Bluetooth

- Bluetooth Version: v4.2
- Transmission Range (Open Area): 10m
- Frequency Response: 100Hz-6KHz  $\pm 3\text{dB}$
- RMS Output Power: 1.5W at DC=5V  
RL=4 $\Omega$  THD  $\leq 10\%$
- Max Output Power: 2W at DC=5V RL=4 $\Omega$  THD  $\leq 20\%$
- HUM at MIN Volume:  $< 5\text{mV}$

### Internet Radio

- RF Frequency: 2.4GHz
- Transmission Range (Open Area): 10m
- Signal to Noise:  $\geq 45\text{dB}$
- Frequency Response: 100Hz-6KHz  $\pm 3\text{dB}$
- RMS Output Power: 1.2W at DC=5V RL=4 $\Omega$  THD  $\leq 1\%$
- Max Output Power: 2W at DC=5V RL=4 $\Omega$  THD  $\leq 20\%$
- HUM at MIN Volume:  $< 5\text{mV}$

### Power Supply

- DC Adapter: AC ~100V-240V -5V  
1000mA Switching Power
- Speaker: 4 $\Omega$  5W 3-inch

### Environmental

- Working Temperature: 0°C ~ 40°C
- Storage Temperature: -20°C ~ 60°C



**EAN:** 5907115003405  
**Imballaggio:** xx pezzi

5 907115 003405 >